

MIL-C-55302 / 56

UMR-MM Series

Male Body / Male Contact: .100" Centers — .050" offset

Description: Straight through male connector without mounting ears.

.100" (2.54) centers
.050" (1.27) offset

Contacts: 10-70

Hardware: See page 5

Contact


Termination: See page 5

Polarization


Configuration: See page 22

Suggested

Mounting: See below

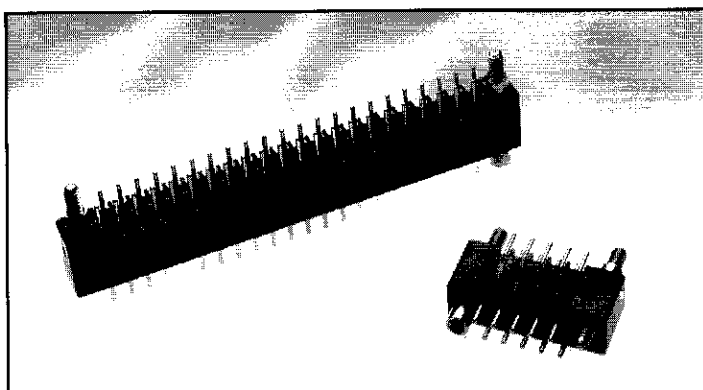

OUTLINE

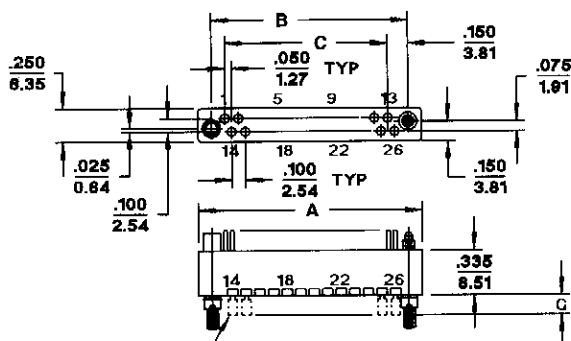


See Available
Contact Options

UMR026MM2SL shown

MOUNTING LAYOUT

MIL-C-55302 / 56

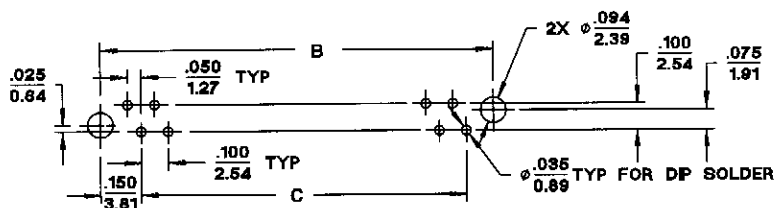

Recommended Hole Pattern
Component Side
For Fixed Hardware

DIMENSIONS

Dimensions are for reference only.
Metric equivalents in (mm) are
given for general information

# Con- tacts	A	B	C	# Con- tacts	A	B	C
10	.850 (21.59)	.650 (16.51)	.400 (10.16)	44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)	50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)	54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)	56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)	60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)	66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)	70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)				