

MIL-C-55302 / 56

UMR-MM Series

Male Body / Male Contact: .100" Centers — .050" offset

ORDERING INFORMATION

MIL-C-55302 / 56


C

26


CONTACT
TERMINATIONS:
A B C E F
(See bottom
chart)

NUMBER OF
CONTACTS:
10 - 70

AVAILABLE CONTACTS

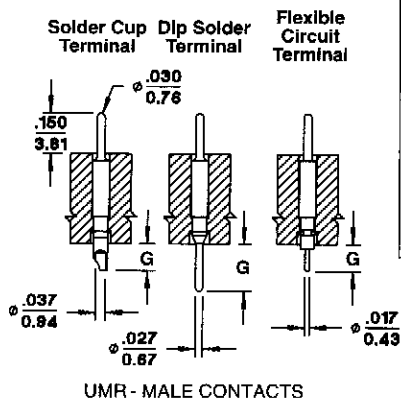

Contact Style	Terminal Type	Contact Term		Extension G ±.010
		CCC	MIL-C	
Male	Solder Cup	0	A	.100 (2.54)
	Dip Solder	2	B	.140 (3.56)
	Dip Solder	3	C	.172 (4.37)
	Flexible Circuit	5	E	.058 (1.47)
	Flexible Circuit	6	F	.100 (2.54)



Designation UMR

RYTON
POLYPHENYLENE
SULFIDE
MIL-M-24519
TYPE GST-40F
COLOR BLACK
STANDARD

026

NUMBER OF
CONTACTS:
10-70

MM

BODY / CONTACT
STYLE
DESIGNATION:
MM = MALE BODY-
MALE PIN
CONTACT

3

CONTACT
TERMINATION:
0, 2, 3
5, 6

SL

TYPE OF
MOUNTING
HARDWARE: SL
OTHER TYPES
SHOWN ON
PG. 24