

MIL-C-55302 / 58

UER-MF Series

Male Body / Female Contact: .100" Centers — .050" offset

ORDERING INFORMATION

MIL-C-55302 / 58

C

26

F


— = STANDARD
INSERTION
FORCE
CONTACT
L = LOW
INSERTION
FORCE
CONTACT

CONTACT
TERMINATIONS:
A B C F E H
(See bottom chart)

NUMBER OF
CONTACTS:
10-70


TYPE (F) OF
MOUNTING
HARDWARE

AVAILABLE CONTACTS



UMR / UER -
FEMALE CONTACTS

Contact Style	Terminal Type	Contact Term		Extension G ±.010
		CCC	MIL-C	
Female	Solder Cup	0	A	.100 (2.54)
	Dip Solder	2	B	.140 (3.56)
	Dip Solder	3	C	.172 (4.37)
	Dip Solder	4	F	.234 (5.94)
	Flexible Circuit	5	E	.058 (1.47)
	Flexible Circuit	6	H	.100 (2.54)

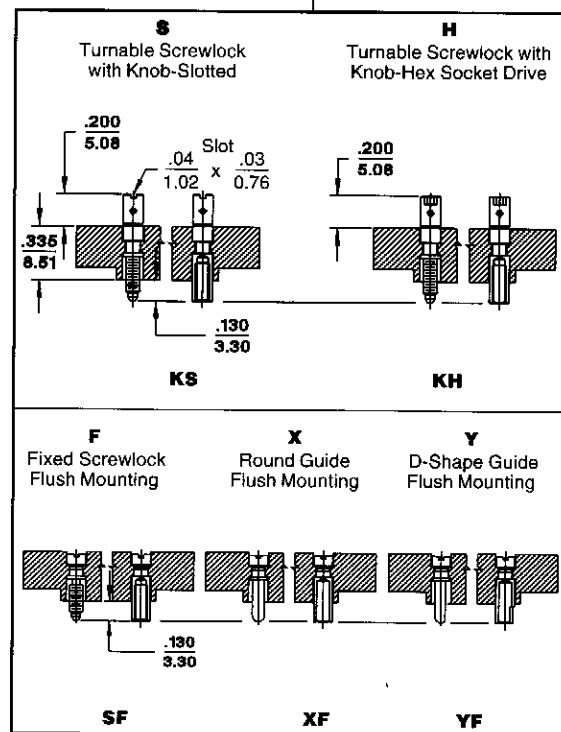

Designation UER

RYTON
POLYPHENYLENE
SULFIDE
MIL-M-24519
TYPE GST-40F
COLOR BLACK
STANDARD

026

NUMBER OF
CONTACTS:
10-70

MF

BODY / CON-
TACT STYLE
DESIGNATION:
MF-MALE BODY-
FEMALE SOCKET
CONTACT

3

CONTACT
TERMINATION:
0, 2, 3
4, 5, 6

SF

OTHER TYPES
SHOWN ON
PG. 24