

**MIL-C-55302 / 60**

**UER-MF Series**

**Male Body / Female Contact: .100" Centers — .050" offset**

**ORDERING INFORMATION**

**MIL-C-55302 / 60**

**B**

**90**

**F**


— = STANDARD  
INSERTION  
FORCE  
CONTACT  
L = LOW  
INSERTION  
FORCE  
CONTACT

CONTACT  
TERMINATIONS:  
A B C E  
(See bottom chart)

NUMBER OF  
CONTACTS:  
90-100-120


TYPE (F) OF  
MOUNTING  
HARDWARE

**AVAILABLE CONTACTS**



UMR / UER - FEMALE CONTACTS

| Contact Style | Terminal Type | Contact Term |       | Extension<br>G ±.010 |
|---------------|---------------|--------------|-------|----------------------|
|               |               | CCC          | MIL-C |                      |
| Female        | Solder Cup    | 0            | A     | .100<br>(2.54)       |
|               | Dip Solder    | 2            | B     | .140<br>(3.56)       |
|               | Dip Solder    | 3            | C     | .172<br>(4.37)       |
|               | Dip Solder    | 4            | E     | .234<br>(5.94)       |

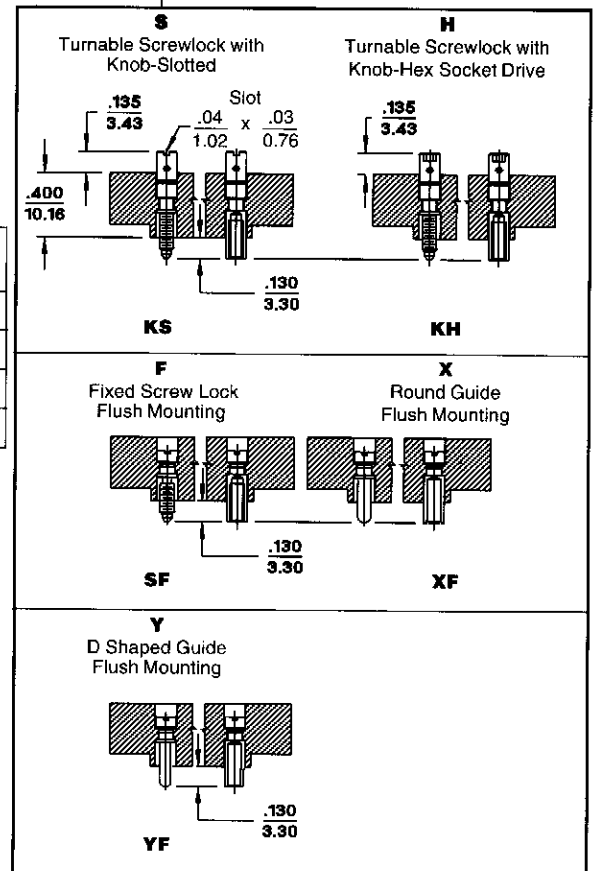

**Designation UER**

**090**

**MF**

**2**

**SF**

RYTON  
POLYPHENYLENE  
SULFIDE  
MIL-M-24519  
TYPE GST-40F  
COLOR BLACK  
STANDARD

NUMBER OF  
CONTACTS:  
90, 100, 120

BODY / CONTACT  
STYLE  
DESIGNATION:  
MF - MALE BODY  
- FEMALE SOCKET  
CONTACT

CONTACT  
TERMINATION:  
0, 2, 3, 4

OTHER TYPES  
SHOWN ON  
PG. 24