

MIL-C-55302 / 62

UMR-MF Series

Male Body / Female Contact: .100" Centers — .050" offset

Description: Straight through socket connector without mounting ears.
 .100" (2.54) centers
 .050" (1.27) offset


Contacts: 10-70

Hardware: See page 17


Contact Termination: See page 17

Polarization Configuration: See page 22

Suggested Mounting: See below

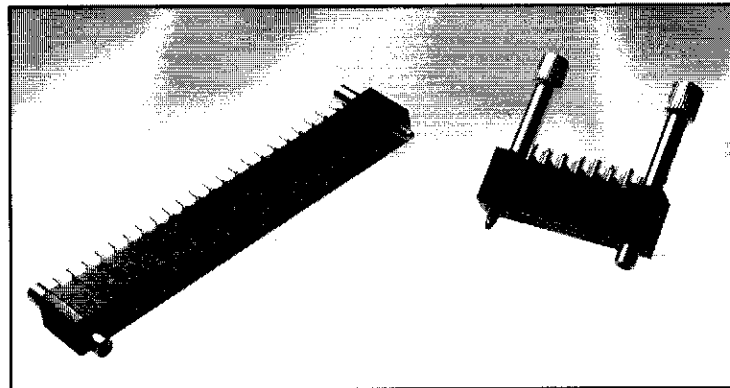


OUTLINE

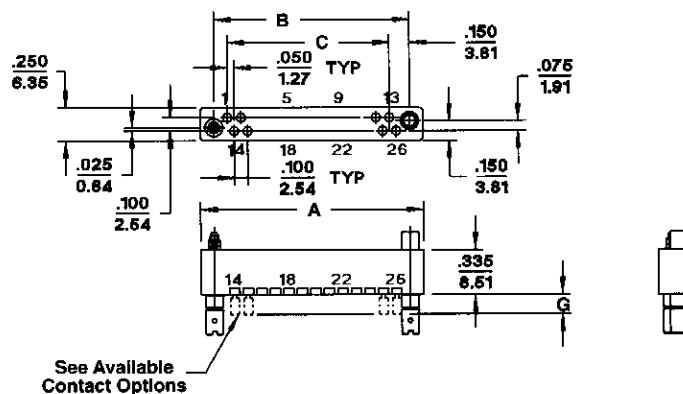

UMR026MF2KS shown

MOUNTING LAYOUT

MIL-C-55302 / 62

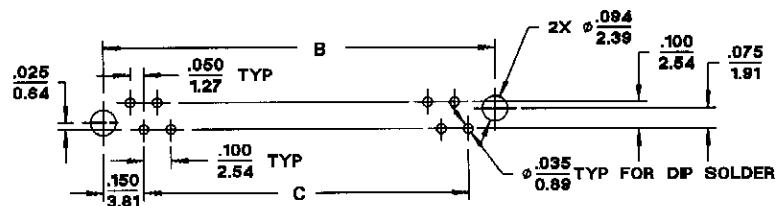

Recommended Hole Pattern
 Component Side
 For Fixed Hardware

DIMENSIONS

Dimensions are for reference only.
 Metric equivalents in (mm) are
 given for general information.

# Con- tacts	A	B	C	# Con- tacts	A	B	C
10	.850 (21.59)	.650 (16.51)	.400 (10.16)	44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)	50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)	54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)	56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)	60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)	66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)	70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)				