


MIL-C-55302 / 63


UMR-FM Series

Description: Straight through male connector without mounting ears.
Contacts: 10-70
Hardware: See page 19
Contacts:
Termination: See page 19
Polarization:
Configuration: See page 22
Suggested Mounting: See below

Female Body / Male Contact: .100" Centers — .050" offset

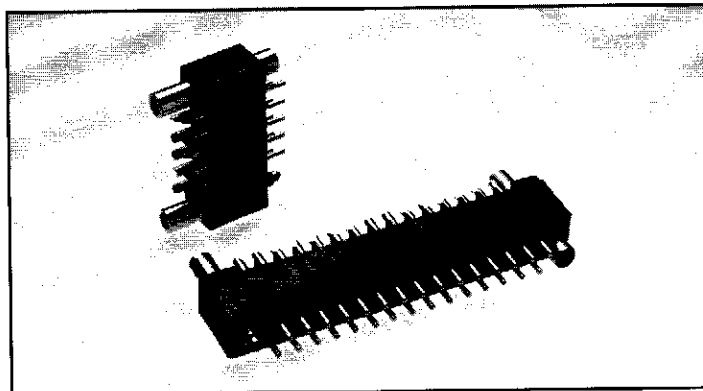


OUTLINE

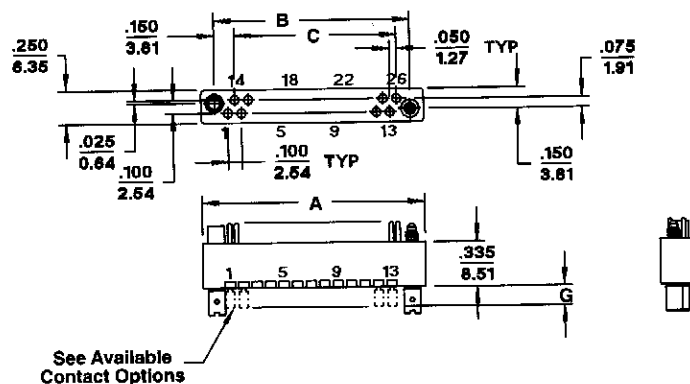

UMR026FM2KS shown

MOUNTING LAYOUT

MIL-C-55302 / 63

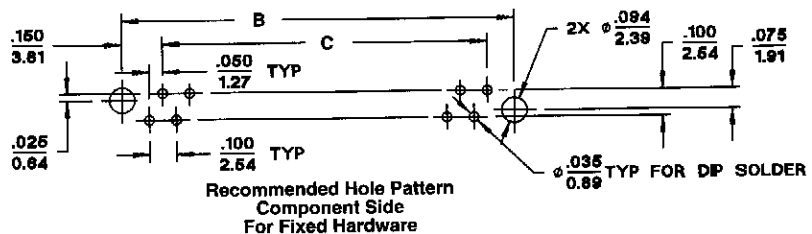

DIMENSIONS

Dimensions are for reference only.
 Metric equivalents in (mm) are
 given for general information.

# Con- tacts	A	B	C	# Con- tacts	A	B	C
10	.850 (21.59)	.650 (16.51)	.400 (10.16)	44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)	50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)	54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)	56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)	60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)	66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)	70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)				