

MIL-C-55302 / 63


UMR-FM Series

Female Body / Male Contact: .100" Centers — .050" offset

ORDERING INFORMATION

MIL-C-55302 / 63

AVAILABLE CONTACTS

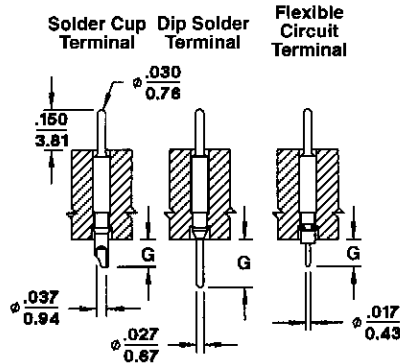

UMR - MALE CONTACTS

Contact Style	Terminal Type	Contact Term		Extension G ±.010
		CCC	MIL-C	
Male	Solder Cup	0	A	.100 (2.54)
	Dip Solder	2	B	.140 (3.58)
	Dip Solder	3	C	.172 (4.37)
	Flexible Circuit	5	D	.058 (1.47)
	Flexible Circuit	6	E	.100 (2.54)

C


CONTACT
TERMINATIONS:
A B C D E
(See bottom chart)

26

NUMBER OF
CONTACTS:
10-70

H

TYPE (H) OF
MOUNTING
HARDWARE

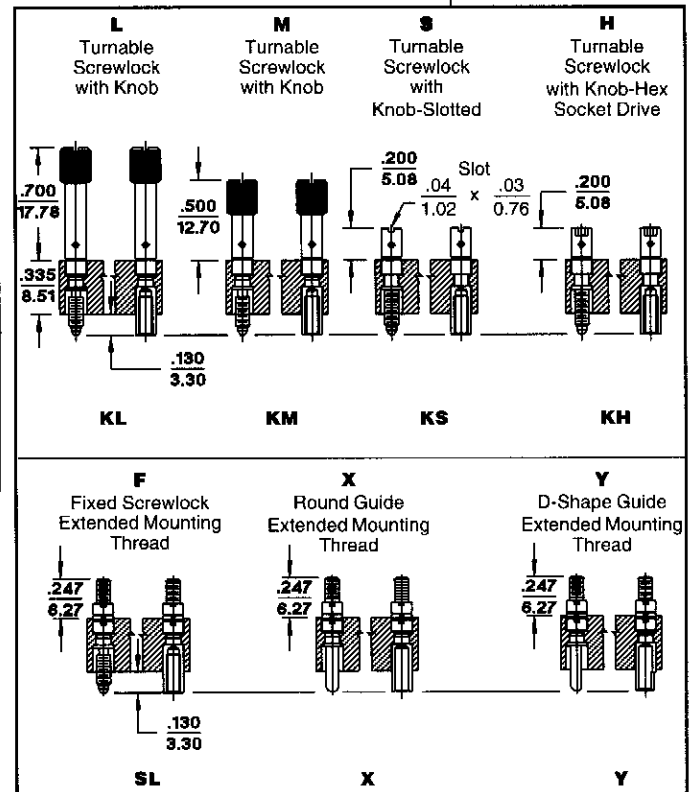

Designation UMR

RYTON
POLYPHENYLENE
SULFIDE
MIL-M-24519
TYPE GST-40F
COLOR BLACK
STANDARD

026

NUMBER OF
CONTACTS:
10-70

FM

BODY / CON-
TACT STYLE
DESIGNATION:
FM-FEMALE
BODY-MALE PIN
CONTACTS

3

CONTACT
TERMINATION:
0, 2, 3
5, 6

KH

TYPE OF
MOUNTING
HARDWARE.
OTHER TYPES
SHOWN ON
PG. 24