


MIL-C-55302 / 64


UMR-MF Series

Male Body / Female Contact: .100" Centers — .050" offset

Description: Straight through socket connector without mounting ears.
 .100" (2.54) centers
 .050" (1.27) offset
Contacts: 10-70
Hardware: See page 21
Contact Termination: See page 21
Polarization: See page 22
Configuration: See page 22
Suggested Mounting: See below

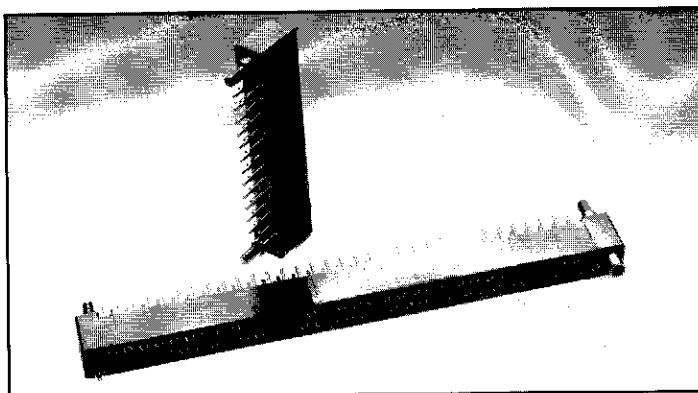


OUTLINE

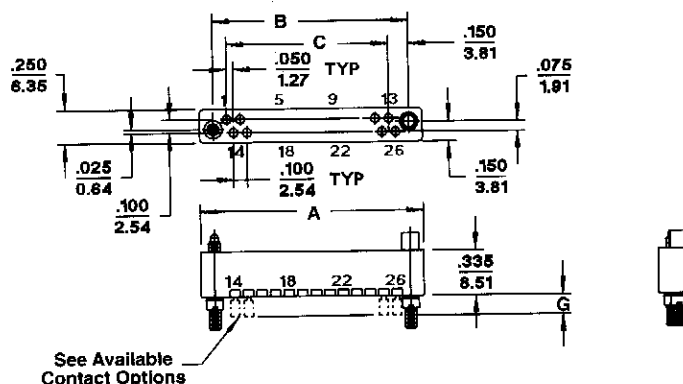

UMR026MF2SL shown

MOUNTING LAYOUT

MIL-C-55302 / 64

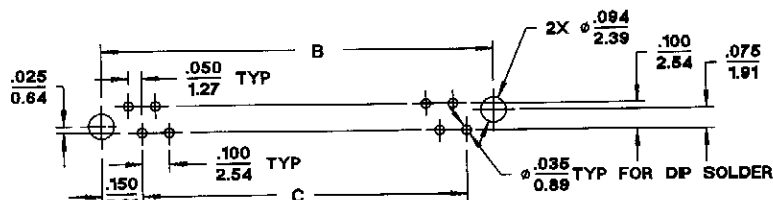

Recommended Hole Pattern
 Component Side
 For Fixed Hardware

DIMENSIONS

Dimensions are for reference only.
 Metric equivalents in (mm) are
 given for general information.

# Con- tacts	A	B	C	# Con- tacts	A	B	C
10	.850 (21.59)	.650 (16.51)	.400 (10.16)	44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)	50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)	54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)	56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)	60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)	66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)	70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)				