



PRINTED CIRCUIT PIN & SOCKET CONNECTORS

MIL-C-55302/6



CONTACT IDENTIFICATION —
NUMERICAL - SIZES 61 & 77 ONLY
ALPHABETICAL-ALL OTHER SIZES

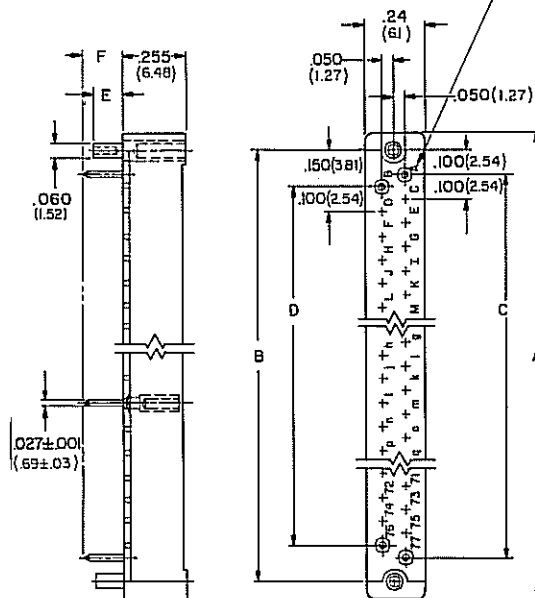


Straight-Thru Sockets

PART NO.	E	F
600-1-() SD16	.128 (3.25)	.164 (4.17)
600-1-() SD11	.090 (2.29)	.110 (2.79)
600-1-() SD16-1	.090 (2.29)	.164 (4.17)
600-1-() SD11-1	.128 (3.25)	.110 (2.79)


↑ Insert number of contacts
(9, 17, 25, 33, 41, 61, 77)

ALTERNATE TERMINALS ON RECEPTACLES

Solder Cup



Wrapping



PART NO.	E
600-1-() SC	.090 (2.29)
600-1-() SC-1	.128 (3.25)



PART NO.	E
600-1-() SW	.128 (3.25)
600-1-() SW-1	.090 (2.29)

SPECIFICATIONS: Refer to page 9

.100" (2.54MM) CONTACT SPACING
2 ROWS OFFSET .050" (1.27MM)

9,17,25,33,41,61,77 CONTACTS

MIL-C-55302/4

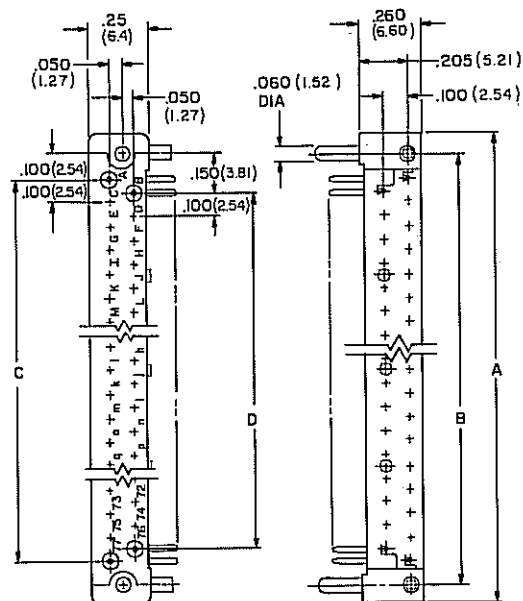

Right-Angle Pins

PART NO.		G	H
600-1-	P	.090 (2.29)	.110 (2.79)
600-1-	P1	.128 (3.25)	.140 (3.56)

↑ Insert number of contacts
(9, 17, 25, 33, 41, 61, 77)

NO. OF CONTACTS	DIMENSIONS			
	A	B	C	D
9	.75 (19.1)	.600 (15.24)	.400 (10.16)	.300 (7.62)
17	1.15 (29.2)	1.000 (25.40)	.800 (20.32)	.700 (17.78)
25	1.55 (39.4)	1.400 (35.56)	1.200 (30.48)	1.100 (27.94)
33	1.95 (49.5)	1.800 (45.72)	1.600 (40.64)	1.500 (38.10)
41	2.35 (59.7)	2.200 (55.88)	2.000 (50.80)	1.900 (48.26)
61	3.35 (85.1)	3.200 (81.28)	3.000 (76.20)	2.900 (73.66)
77	4.15 (105.4)	4.000 (101.60)	3.800 (96.52)	3.700 (93.98)

CROSS-REFERENCE

<u>MIL P/N</u>	<u>CCC P/N</u>	<u>MIL P/N</u>	<u>CCC P/N</u>
M55302/4-01	600-1-9P	M55302/6-01	600-1-9SD16
M55302/4-02	600-1-17P	M55302/6-02	600-1-17SD16
M55302/4-03	600-1-25P	M55302/6-03	600-1-25SD16
M55302/4-04	600-1-33P	M55302/6-04	600-1-33SD16
M55302/4-05	600-1-41P	M55302/6-05	600-1-41SD16
M55302/4-06	600-1-77P	M55302/6-06	600-1-77SD16