

## Metallized Paper (MP) RFI-Capacitors Class X1 PCM 10 mm to 27.5 mm

### Special Features

- Particularly high reliability against active and passive flammability
- Excellent self-healing as well as high voltage strength
- High degree of interference suppression due to good attenuation and low ESR
- For temperatures up to +110° C
- According to RoHS 2002/95/EC

### Typical Applications

Class X1 RFI applications to meet EMC regulations

- Capacitors connected to the mains between phase and neutral or phase and phase conductors
- Installation category III in accordance with IEC 60664, pulse peak voltage  $\leq 4$  kV

### Construction


#### Dielectric:

Paper, epoxy resin impregnated

#### Capacitor electrodes:

Vacuum-deposited

#### Internal construction:

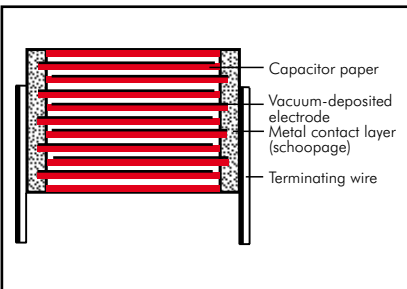

#### Encapsulation:

Self-extinguishing epoxy resin, UL 94 V-0, metal foil

#### Terminations:

Tinned wire.

#### Marking:

Marking: Black on Silver.

### Electrical Data

#### Capacitance range:

1000 pF to 0.22  $\mu$ F (E12-values on request)

#### Rated voltages:

300 VAC, 440 VAC, 500 VAC

#### Continuous DC voltage\* (general guide):

$\leq 730$  V for 300 VAC

$\leq 850$  V for 440 VAC and 500 VAC

#### Capacitance tolerances: $\pm 20\%$

#### Operating temperature range:

-40° C to +110° C

#### Climatic test category:

40/110/56/C in accordance with IEC

#### Insulation resistance at +20° C:

$\geq 12 \times 10^3$  M $\Omega$

#### Measuring voltage:

100 V/1 min. for 300 VAC and 440 VAC

500 V/1 min. for 500 VAC

#### Dissipation factors:

$\tan \delta \leq 13 \times 10^{-3}$  at 1 kHz and +20° C

#### Approvals:

Country	Authority	Specification	Symbol	Approval-No.
Germany	VDE	IEC 60384-14/3		101355 (440/500 VAC) 89748 (300 VAC)
USA	UL	UL 1283		E 100438 (300 VAC)
Canada	CSA	C 22.2 No. 8		LR 93312-1 (300 VAC)

#### Test specifications:

In accordance with IEC 60384-14

#### Maximum pulse rise time:

Capacitance pF/ $\mu$ F	Pulse rise time V/ $\mu$ sec max. operation
1000 ... 1500	1100
2200 ... 4700	500
6800 ... 0.033	200
0.047 ... 0.22	100

for pulses equal to a voltage amplitude with  $\sqrt{2} \times 300$  VAC = 425 V, with  $\sqrt{2} \times 440$  VAC = 623 V, with  $\sqrt{2} \times 500$  VAC = 707 V according to IEC 60384-14

**Test voltage:** 3000 VDC, 2 sec.

#### Reliability:

Operational life > 300 000 hours

Failure rate < 1 fit (0.5 x  $U_r$  and 40° C)

### Mounting Recommendation

To minimize or avoid shock and/or vibration stresses to terminating wires and solder connections we recommend to fix voluminous resin-potted MP capacitors as from e.g. PCM 22.5 mm in an appropriate way since for constructional reasons they do not sit tight on the board.

\* If safety-approved EMI suppression capacitors are operated with a DC voltage being above the specified AC voltage rating the given approvals are no longer valid (IEC 60384-14).

Furthermore the permissible pulse rise time  $du/dt$  ( $F_{max.}$ ) will be subject to a reduction according to

$$F_{max.} = F_r \times \sqrt{2} \times UAC / UDC$$

if the DC operating voltage UDC is higher than  $\sqrt{2} \times UAC$

### Packing

Available taped and reeled up to and including PCM 22.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.


## Continuation

### General Data

Capacitance	300 VAC*					440 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	8.5	13.5	10	MPX12W1100FA00_					
1500 "	4	8.5	13.5	10	MPX12W1150FA00_					
2200 "	4	8.5	13.5	10	MPX12W1220FA00_					
3300 "	4	8.5	13.5	10	MPX12W1330FA00_					
4700 "	5	10	13.5	10	MPX12W1470FB00_					
6800 "	5	13	19	15	MPX12W1680FC00_	5	13	19	15	MPX14W1680FC00_
0.01 µF	5	13	19	15	MPX12W2100FC00_	5	13	19	15	MPX14W2100FC00_
0.015 "	6	14	19	15	MPX12W2150FD00_	6	14	19	15	MPX14W2150FD00_
0.022 "	7	15	19	15	MPX12W2220FE00_	7	15	19	15	MPX14W2220FE00_
0.033 "	8	17	19	15	MPX12W2330FF00_	10	18	19	15	MPX14W2330FG00_
0.047 "	10	18	19	15	MPX12W2470FG00_					
0.068 "	8	20	28	22.5	MPX12W2680FH00_					
0.1 µF	10	22	28	22.5	MPX12W3100FI00_					
0.15 "	12	24	28	22.5	MPX12W3150FJ00_					
0.22 "	13	25	33	27.5	MPX12W3220FK00_					

Capacitance	500 VAC*				
	W	H	L	PCM**	Part number
6800 pF	5	13	19	15	MPX15W1680FC00_
0.01 µF	5	13	19	15	MPX15W2100FC00_
0.015 "	6	14	19	15	MPX15W2150FD00_
0.022 "	7	15	19	15	MPX15W2220FE00_
0.033 "	10	18	19	15	MPX15W2330FG00_

\*\* PCM = Printed circuit module = pin spacing  
Upon request with long pins 35-2 mm max.

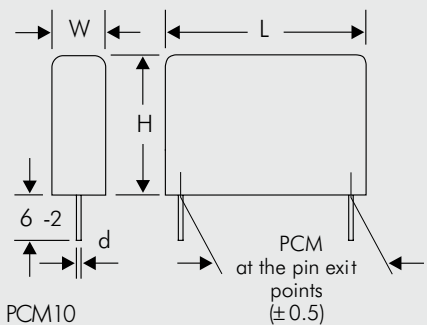

d = 0.6 φ if PCM10  
d = 0.8 φ if PCM ≥ 15

\* f = 50/60 Hz

Dims in mm.

Rights reserved to amend design data without prior notification.

Part number completion:  
Tolerance: 20 % = M  
Packing: bulk = S  
Pin length: 6-2 = SD  
Taped version see page 127.

## Typical Graphs of the Capacitor Paper Dielectric


valid for:

MP 3-X2


MP 3-X1

MP 3-Y2


MP 3R-Y2

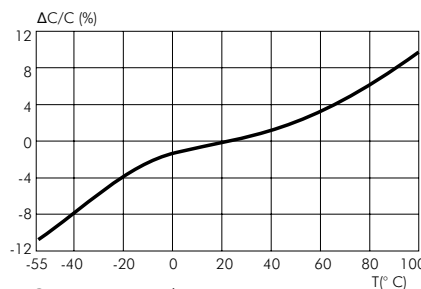


Capacitance change versus temperature (f=1 kHz) (general guide)

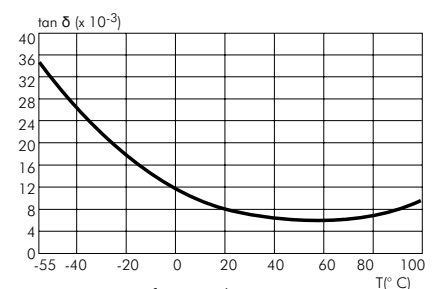

Dissipation factor change versus temperature (f=1 kHz) (general guide)

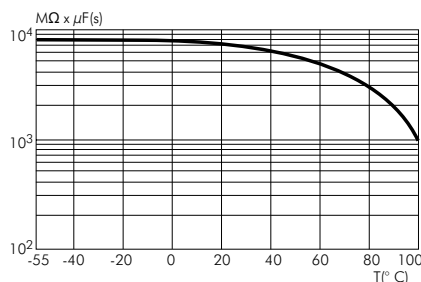

Insulation resistance change versus temperature (general guide)

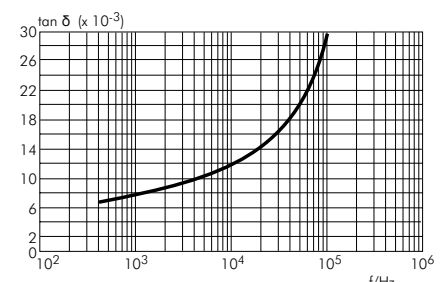

Dissipation factor change versus frequency (general guide).

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

A preheating of through-hole WIMA capacitors is allowed for temperatures  $T_{max} < 100^{\circ}C$ . In practice a preheating duration of  $t < 5$  min. has been proven to be best.


#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Immersion time:  $t < 5$  sec

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
Immersion time:  $2 \times t < 3$  sec

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

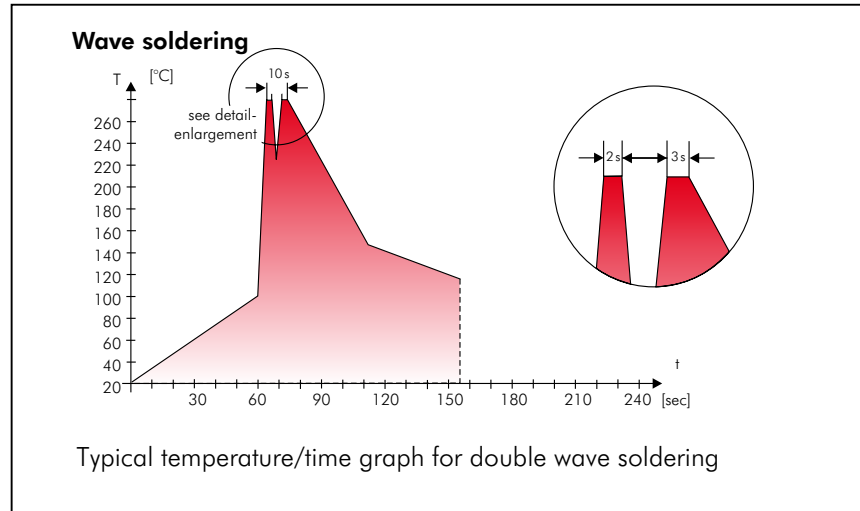

## WIMA Quality and Environmental Philosophy

### ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2002/95/EC certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2002/95/EG


WIMA capacitors are lead free in accordance with RoHS 2002/95/EC

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

# Typical Dimensions for Taping Configuration

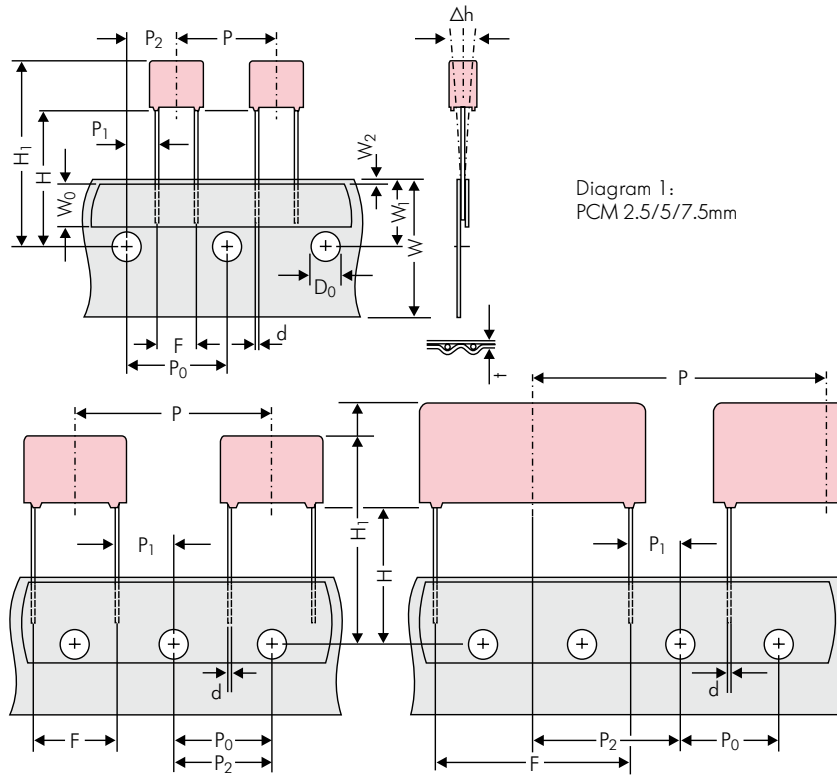

\*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 128)	ROLL/AMMO			AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions	REEL	φ 360 max. φ 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1
Unit	see details page 130.							

Dims in mm.

\* Diameter of pins see General Data.

\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P<sub>0</sub> = 12.7 or 15.0 is possible

Please clarify customer-specific deviations with the manufacturer.

# Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5 N	H18.5 O	ø 360 H16.5 F	ø 500 H18.5 I	H16.5 H	H18.5 J	340 x 340 H16.5 A	490 x 370 H18.5 C	H16.5 B
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200		2500		-		2800		-
	3	7.5	4.6	<b>0C</b>	5000		2000		2300		-		2300		-
	3.8	8.5	4.6	<b>0D</b>	5000		1500		1800		-		1800		-
	4.6	9	4.6	<b>0E</b>	5000		1200		1500		-		1500		-
	5.5	10	4.6	<b>0F</b>	5000		900		1200		-		1200		-
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200		2500		-		2800		-
	3	7.5	7.2	<b>1B</b>	5000		2000		2300		-		2300		-
	3.5	8.5	7.2	<b>1C</b>	5000		1600		2000		-		2000		-
	4.5	6	7.2	<b>1D</b>	6000		1300		1500		-		1500		-
	4.5	9.5	7.2	<b>1E</b>	4000		1300		1500		-		1500		-
	5	10	7.2	<b>1F</b>	3500		1100		1400		-		1400		-
	5.5	7	7.2	<b>1G</b>	4000		1000		1200		-		1200		-
	5.5	11.5	7.2	<b>1H</b>	2500		1000		1200		-		1200		-
	6.5	8	7.2	<b>1I</b>	2500		800		1000		-		1000		-
	7.2	8.5	7.2	<b>1J</b>	2500		700		1000		-		1000		-
	7.2	13	7.2	<b>1K</b>	2000		700		950		-		1000		-
	8.5	10	7.2	<b>1L</b>	2000		600		800		-		800		-
8.5	14	7.2	<b>1M</b>	1500		600		800		-		800		-	
11	16	7.2	<b>1N</b>	1000		500		700		-		700		-	
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000		-		2500		4400		2500		-
	3	8.5	10	<b>2B</b>	5000		-		2200		4300		2300		4150
	4	9	10	<b>2C</b>	4000		-		1700		3200		1700		3100
	4.5	9.5	10.3	<b>2D</b>	3500		-		1500		2900		1400		2800
	5	10.5	10.3	<b>2E</b>	3000		-		1300		2500		1300		-
	5.7	12.5	10.3	<b>2F</b>	2000		-		1000		2200		1100		-
	7.2	12.5	10.3	<b>2G</b>	1500		-		900		1800		1000		-
<b>10 mm</b>	3	9	13	<b>3A</b>	3000		-		1100		2200		-		1900
	4	8.5	13.5	<b>FA</b>	3000		-		900		1600		-		1450
	4	9	13	<b>3C</b>	3000		-		900		1600		-		1450
	4	9.5	13	<b>3D</b>	3000		-		900		1600		-		1400
	5	10	13.5	<b>FB</b>	2000		-		700		1300		-		1200
	5	11	13	<b>3F</b>	3000		-		700		1300		-		1200
	6	12	13	<b>3G</b>	2400		-		550		1100		-		1000
	6	12.5	13	<b>3H</b>	2400		-		550		1100		-		1000
8	12	13	<b>3I</b>	2000		-		400		800		-		740	
<b>15 mm</b>	5	11	18	<b>4B</b>	2400		-		600		1200		-		1150
	5	13	19	<b>FC</b>	1000		-		600		1200		-		1200
	6	12.5	18	<b>4C</b>	2000		-		500		1000		-		1000
	6	14	19	<b>FD</b>	1000		-		500		1000		-		1000
	7	14	18	<b>4D</b>	1600		-		450		900		-		850
	7	15	19	<b>FE</b>	1000		-		450		900		-		850
	8	15	18	<b>4F</b>	1200		-		400		800		-		740
	8	17	19	<b>FF</b>	500		-		400		800		-		740
	9	14	18	<b>4H</b>	1200		-		350		700		-		650
	9	16	18	<b>4J</b>	900		-		350		700		-		650
	10	18	19	<b>FG</b>	500		-		300		650		-		590
11	14	18	<b>4M</b>	1000		-		300		600		-		540	
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200		-		-		800		-		770
	6	15	26.5	<b>5B</b>	1000		-		-		700		-		640
	7	16.5	26.5	<b>5D</b>	760		-		-		600		-		550
	8	20	28	<b>FH</b>	500		-		-		500		-		480
	8.5	18.5	26.5	<b>5F</b>	500		-		-		480		-		450
	10	22	28	<b>FI</b>	540*		-		-		420		-		380
	10.5	19	26.5	<b>5G</b>	680*		-		-		400		-		360
	10.5	20.5	26.5	<b>5H</b>	680*		-		-		400		-		360
	11	21	26.5	<b>5I</b>	680*		-		-		380		-		350
	12	24	28	<b>FJ</b>	450*		-		-		350		-		310

\* Tray Packing-System  
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing units								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360		ø 500		340 × 340	
					N	O	F	I	H	J	A	C	B	D
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	640*	–	–	–	–	460/340*	–	–	–	420
	11	21	31.5	<b>6B</b>	544*	–	–	–	–	380/280*	–	–	–	350
	13	24	31.5	<b>6D</b>	448*	–	–	–	–	300	–	–	–	290
	13	25	33	<b>6K</b>	336*	–	–	–	–	270	–	–	–	250
	15	26	31.5	<b>6F</b>	384*	–	–	–	–	–	–	–	–	–
	15	26	33	<b>6L</b>	288*	–	–	–	–	–	–	–	–	–
	17	29	31.5	<b>6G</b>	176*	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	<b>6I</b>	176*	–	–	–	–	–	–	–	–	–
	19	30	31.5	<b>6L</b>	50*	–	–	–	–	–	–	–	–	–
	20	32	33	<b>6M</b>	216*	–	–	–	–	–	–	–	–	–
20	39.5	31.5	<b>6J</b>	144*	–	–	–	–	–	–	–	–	–	
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	480*	–	–	–	–	–	–	–	–	–
	11	22	41.5	<b>7B</b>	408*	–	–	–	–	–	–	–	–	–
	13	24	41.5	<b>7C</b>	252*	–	–	–	–	–	–	–	–	–
	15	26	41.5	<b>7D</b>	144*	–	–	–	–	–	–	–	–	–
	17	29	41.5	<b>7E</b>	132*	–	–	–	–	–	–	–	–	–
	19	32	41.5	<b>7F</b>	108*	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	<b>7G</b>	108*	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	<b>7H</b>	84*	–	–	–	–	–	–	–	–	–
	31	46	41.5	<b>7I</b>	72*	–	–	–	–	–	–	–	–	–
	35	50	41.5	<b>7J</b>	35*	–	–	–	–	–	–	–	–	–
40	55	41.5	<b>7K</b>	28*	–	–	–	–	–	–	–	–	–	
<b>48.5 mm</b>	19	31	56	<b>8D</b>	50*	–	–	–	–	–	–	–	–	–
	23	34	56	<b>8E</b>	72*	–	–	–	–	–	–	–	–	–
	27	37.5	56	<b>8H</b>	60*	–	–	–	–	–	–	–	–	–
	33	48	56	<b>8J</b>	48*	–	–	–	–	–	–	–	–	–
	37	54	56	<b>8L</b>	25*	–	–	–	–	–	–	–	–	–
<b>52.5 mm</b>	35	50	57	<b>9F</b>	25*	–	–	–	–	–	–	–	–	–
	45	55	57	<b>9H</b>	20*	–	–	–	–	–	–	–	–	–
	45	65	57	<b>9J</b>	20*	–	–	–	–	–	–	–	–	–

\* for 2-inch transport pitches.

\* Tray Packing System

Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Special features (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>M</b>	<b>K</b>	<b>S</b>	<b>2</b>	<b>C</b>	<b>0</b>	<b>2</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>A</b>	<b>0</b>	<b>0</b>	<b>M</b>	<b>S</b>	<b>S</b>	<b>D</b>
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p><b>Type description:</b></p> <p>SMD-PET = SMDT                  SMD-PPS = SMDI                  FKP 02 = FKP0                  MKS 02 = MKS0                  FKS 2 = FKS2                  FKP 2 = FKP2                  MKS 2 = MKS2                  MKP 2 = MKP2                  FKS 3 = FKS3                  FKP 3 = FKP3                  MKS 4 = MKS4                  MKP 4 = MKP4                  MKP 10 = MKP1                  FKP 4 = FKP4                  FKP 1 = FKP1                  MKP-X2 = MKX2                  MKP-X2 R = MKXR                  MKP-Y2 = MKY2                  MP 3-X2 = MPX2                  MP 3-X1 = MPX1                  MP 3-Y2 = MPY2                  MP 3R-Y2 = MPRY                  Snubber MKP = SNMP                  Snubber FKP = SNFP                  GTO MKP = GTOM                  DC-LINK MKP 4 = DCP4                  DC-LINK MKP 5 = DCP5                  DC-LINK MKP 6 = DCP6                  DC-LINK HC = DCH_                  SuperCap C = SCSC                  SuperCap MC = SCMC                  SuperCap R = SCSR                  SuperCap MR = SCMR</p>	<p><b>Rated voltage:</b></p> <p>2.5 VDC = A1                  4 VDC = A2                  14 VDC = A3                  28 VDC = A4                  40 VDC = A5                  5 VDC = A6                  50 VDC = B0                  63 VDC = C0                  100 VDC = D0                  160 VDC = E0                  250 VDC = F0                  400 VDC = G0                  450 VDC = H0                  600 VDC = I0                  630 VDC = J0                  700 VDC = K0                  800 VDC = L0                  850 VDC = M0                  900 VDC = N0                  1000 VDC = O1                  1100 VDC = P0                  1200 VDC = Q0                  1250 VDC = R0                  1500 VDC = S0                  1600 VDC = T0                  2000 VDC = U0                  2500 VDC = V0                  3000 VDC = W0                  4000 VDC = X0                  6000 VDC = Y0                  250 VAC = 0W                  275 VAC = 1W                  300 VAC = 2W                  400 VAC = 3W                  440 VAC = 4W                  500 VAC = 5W</p>	<p><b>Capacitance:</b></p> <p>22 pF = 0022                  47 pF = 0047                  100 pF = 0100                  150 pF = 0150                  220 pF = 0220                  330 pF = 0330                  470 pF = 0470                  680 pF = 0680                  1000 pF = 1100                  1500 pF = 1150                  2200 pF = 1220                  3300 pF = 1330                  4700 pF = 1470                  6800 pF = 1680                  0.01 µF = 2100                  0.022 µF = 2220                  0.047 µF = 2470                  0.1 µF = 3100                  0.22 µF = 3220                  0.47 µF = 3470                  1 µF = 4100                  2.2 µF = 4220                  4.7 µF = 4470                  10 µF = 5100                  22 µF = 5220                  47 µF = 5470                  100 µF = 6100                  220 µF = 6220                  1 F = A010                  2.5 F = A025                  50 F = A500                  100 F = B100                  110 F = B110                  600 F = B600                  1200 F = C120                  ...</p>	<p><b>Size:</b></p> <p>4.8x3.3x3 Size 1812 = KA                  4.8x3.3x4 Size 1812 = KB                  5.7x5.1x3.5 Size 2220 = QA                  5.7x5.1x4.5 Size 2220 = QB                  7.2x6.1x3 Size 2824 = TA                  7.2x6.1x5 Size 2824 = TB                  10.2x7.6x5 Size 4030 = VA                  12.7x10.2x6 Size 5040 = XA                  15.3x13.7x7 Size 6054 = YA                  2.5x7x4.6 PCM 2.5 = 0B                  3x7.5x4.6 PCM 2.5 = 0C                  2.5x6.5x7.2 PCM 5 = 1A                  3x7.5x7.2 PCM 5 = 1B                  2.5x7x10 PCM 7.5 = 2A                  3x8.5x10 PCM 7.5 = 2B                  3x9x13 PCM 10 = 3A                  4x9x13 PCM 10 = 3C                  5x11x18 PCM 15 = 4B                  6x12.5x18 PCM 15 = 4C                  5x14x26.5 PCM 22.5 = 5A                  6x15x26.5 PCM 22.5 = 5B                  9x19x31.5 PCM 27.5 = 6A                  11x21x31.5 PCM 27.5 = 6B                  9x19x41.5 PCM 37.5 = 7A                  11x22x41.5 PCM 37.5 = 7B                  94x49x182 DCH_ = H0                  94x77x182 DCH_ = H1                  ...</p> <p><b>Special features:</b></p> <p>Standard = 00                  Version A1 = 1A                  Version A1.1.1 = 1B                  Version A1.2 = 1C                  ...</p>	<p><b>Tolerance:</b></p> <p>20% = M                  10% = K                  5% = J                  2.5% = H                  1% = E                  ...</p> <p><b>Packing:</b></p> <p>AMMO H16.5 340x340 = A                  AMMO H16.5 490x370 = B                  AMMO H18.5 340x340 = C                  AMMO H18.5 490x370 = D                  REEL H16.5 360 = F                  REEL H16.5 500 = H                  REEL H18.5 360 = I                  REEL H18.5 500 = J                  ROLL H16.5 = N                  ROLL H18.5 = O                  BLISTER W12 180 = P                  BLISTER W12 330 = Q                  BLISTER W16 330 = R                  BLISTER W24 330 = T                  Bulk Standard = S                  TPS Standard = Y                  ...</p> <p><b>Lead length (untaped)</b></p> <p>3.5 ±0.5 = C9                  6 -2 = SD                  16 ±1 = P1                  ...</p>
---	--	---	--	---

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.