# MIL-C-55302 / 59

## URR-FM Series

## Female Body / Male Contact: .100" Centers — .050" offset

**Description:** Right angle male connector with mounting ears. .100" (2.54) centers .050" (1.27) offset

**Contacts:** 90, 100, 120

**Hardware:** See page 11

**Contact Termination:** See page 11

**Polarization Configuration:** See page 22

**UWR-FM:** Same as above but without mounting ears.



## OUTLINE




URR100FM2XF shown

## MOUNTING LAYOUT

**MIL-C-55302 / 59**

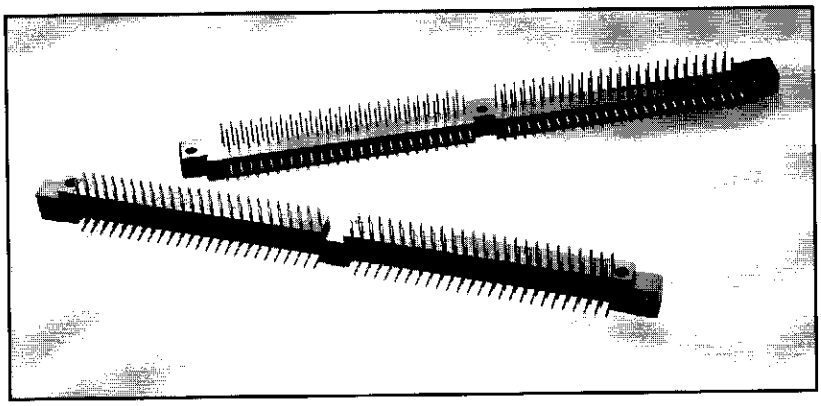

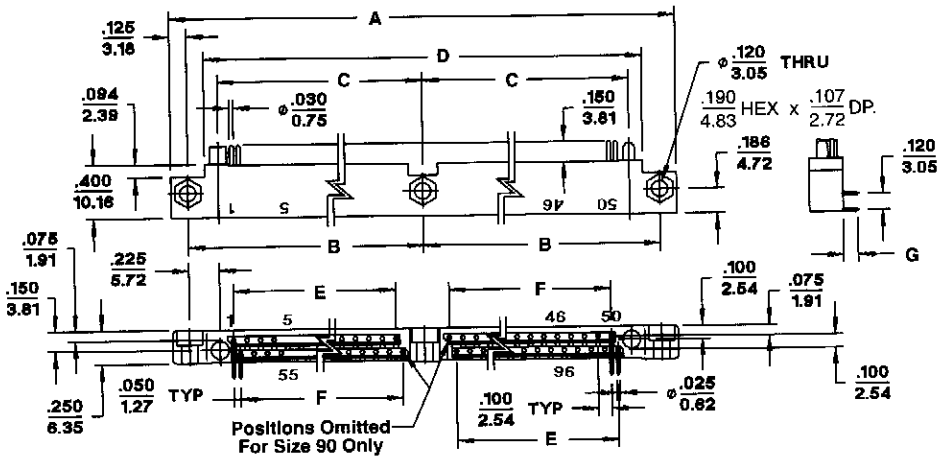
## DIMENSIONS

*Dimensions are for reference only. Metric equivalents in (mm) are given for general information*

| # Contacts | A | B | C | D | E | F |
|---|---|---|---|---|---|---|
| 90 | 5.650 (143.51) | 2.700 (68.58) | 2.475 (62.87) | 5.150 (130.81) | 2.200 (58.88) | 2.100 (53.34) |
| 100 | 6.150 (156.21) | 2.950 (74.93) | 2.725 (69.22) | 5.650 (143.51) | 2.400 (60.96) | 2.400 (60.96) |
| 120 | 7.150 (181.61) | 3.450 (87.63) | 3.225 (81.92) | 6.650 (168.91) | 2.900 (73.66) | 2.900 (73.66) |

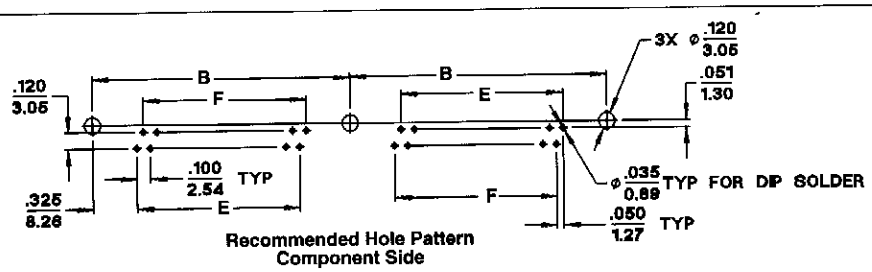

micross components